

The Lifestyle RNC Digital Control Part #99-DX-01

Part # 99-DX-01

The Lifestyle RNC Digital Control offers advanced features to control your home's ventilation.

Key Features

- 2 Speed Fan setting (Low-1/High-2)
- Standby setting (Fan speed 0)
- Electronic Dehumidistat
- Four Selectable Modes of Operation
 - 20 min. ON / 40 min. off, 20 min. ON / 40 min. recirculate *
 - Continuous Ventilation, Continuous Circulation *
- 20 / 40 / 60 High Speed override button
- Instruction Card is inserted in the control
- Easy to read LCD Screen
- Slim-line design
- Connect to 3 wire 20 gauge low voltage wire

Setting the Control

1. Refresh the screen: use the ON/OFF button to turn the control OFF and ON.
2. Press the SET button.
3. The "FAN" symbol flashes. SCROLL (by using the Up/Down arrows) to select the desired fan speed (0, 1 or 2). Press the SET button.
4. "VENT", "20/40", "20/40 RECIRC", "RECIRC" or "OFF" will flash. SCROLL to select the desired mode of operation. Press SET button. *RECIRC is not available on all models. **Timers will not function when mode of operation is set to "OFF".

Setting the Dehumidistat

1. Refresh the screen: use the ON/OFF button to turn the control OFF and ON.
2. Press and release MODE until "RH" flashes.
3. SCROLL to the desired RH number. Press the MODE button.

Note: Refer to the Operation & Installation manual for information on how the Dehumidistat works.

20/40/60 Minute High Speed Timer

This function temporarily initiates high speed ventilation for 20, 40 or 60 minutes.


1. Refresh the screen: use the ON/OFF button to turn the control OFF and ON.
2. Press FAN button once for 20, two times for 40, three times for 60 minutes, and four times to cancel the timer.

The Lifestyle RNC Digital Control Gives you 4 Mode Selection

The Lifestyle RNC Digital Control has 4 Operational Modes* and 2 speeds on each mode to adjust indoor ventilation levels. Experiment with the ventilation levels in your home to evaluate the best amount of ventilation to suit your home and preferences.

I. Continuous Ventilation Mode

This is the most popular mode since it provides continuous ventilation within the home. You may, for example, select Continuous Ventilation at high speed for high household activity levels or Continuous Ventilation for lower activity levels.

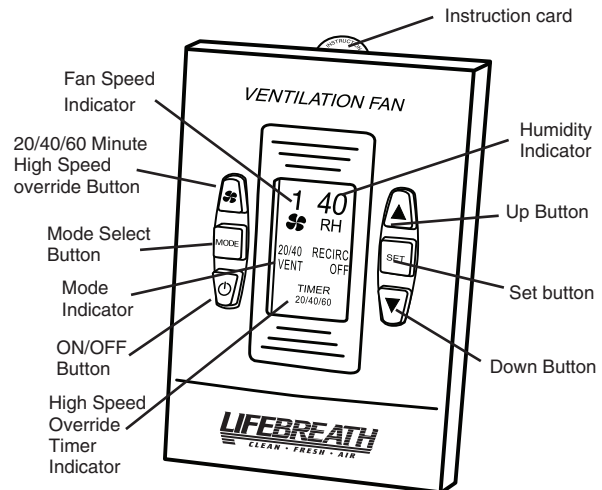

Connects to 3 wire 20 gauge low voltage wire

II. 20 minutes ON, 40 minutes OFF Mode

This Operational Mode will provide 20 minutes of ventilation each hour. You may wish to use this ventilation mode in low speed for low household activity levels or if the home is unoccupied.

III. 20 minutes ON, 40 minutes Recirculation Mode*

This Operational Mode provides 20 minutes of ventilation (fresh air) and 40 minutes of recirculated air. Use this mode only if your HRV is not connected to a forced air system (the forced air system already circulates household air).

IV. Continuous Recirculation Mode*

This Operational Mode recirculates your household air (no ventilation). Use this mode only if HRV is not connected to a forced air system.

How to Synchronize the Humidity Setting on the Lifestyle RNC Digital Control

The Lifestyle RNC Digital wall control has a feature that will allow it to be synchronized with other humidity instruments in your home.

1. Turn off the control with the ON/OFF Button.
2. Simultaneously press and release the ON/OFF Button and the 20/40/60 Minute High Speed Override Button.
3. Use the Up/Down buttons to adjust the Humidity indicator on the display screen to the number of degrees difference between your humidity measuring device. Minus is indicated by flashing.
4. Press the MODE button.

*Recirculation not available on all models.